

FCC EMC Test Report



Subject to

Supplier's Declaration of Conformity

Procedure

Product : Streaming Audio Receiver

Trade Mark : IEAST

Model Number : oliostream 1, oliostream SE, oliostream
one

Prepared for

SHENZHEN UYESEE TECHNOLOGY CO., LTD.

201C, Building C6, Hengfeng Industrial City, Hezhou Road, Hangcheng Street, Baoan
District, Shenzhen

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an
District, Shenzhen 518126 P.R.China.

Tel.: 400-800-6106, 0755-2320 0050 / 2320 0090 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's Name**: SHENZHEN UYESEE TECHNOLOGY CO., LTD.Address.....: 201C, Building C6, Hengfeng Industrial City, Hezhou Road,
Hangcheng Street, Baoan District, Shenzhen**Manufacturer's Name**.....: SHENZHEN UYESEE TECHNOLOGY CO., LTD.Address.....: 201C, Building C6, Hengfeng Industrial City, Hezhou Road,
Hangcheng Street, Baoan District, Shenzhen**Product description**

Product name.....: Streaming Audio Receiver

Model and/or type reference ...: oliostream 1, oliostream SE, oliostream one

Standards.....: 47 CFR FCC part 15 subpart B, 10-1-2020
ANSI C63.4:2014

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests: 10 Sep. 2021 ~ 17 Sep. 2021

Date of Issue: 17 Sep. 2021

Test Result.....: **Pass**

Testing Engineer :



(Estelle Chen)

Technical Manager :



(Sky Zhang)

Authorized Signatory :



(Alex)

Table of Contents

Page

1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 DESCRIPTION OF TEST SETUP	9
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	10
2.5 MEASUREMENT INSTRUMENTS LIST	11
3 . EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION	12
3.1.2 TEST PROCEDURE	13
3.1.3 TEST SETUP	13
3.1.4 EUT OPERATING CONDITIONS	13
3.1.5 TEST RESULTS	14
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
3.2.2 TEST PROCEDURE	16
3.2.3 TEST SETUP	17
3.2.4 EUT OPERATING CONDITIONS	17
3.2.5 TEST RESULTS(30-1000MHz)	18
3.2.6 TEST RESULTS(Above 1000MHz)	20
4 . EUT TEST PHOTO	22
ATTACHMENT PHOTOGRAPHS OF EUT	24

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
47 CFR FCC part 15 subpart B, 10-1-2020 ANSI C63.4: 2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)
The Certificate Registration Number is L5516

IC-Registration : The Certificate Registration Number is CN0074

FCC- Accredited : Test Firm Registration Number: 463705
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Measurement Frequency Range	K	U(dB)
AC Mains Conducted Emission	0.009kHz ~ 0.15MHz	2	2.66
AC Mains Conducted Emission	0.15MHz ~ 30MHz	2	2.80
Telecom Conducted Emission (Cat 3)	0.15MHz ~ 30MHz	2	2.40
Telecom Conducted Emission (Cat 5)	0.15MHz ~ 30MHz	2	2.58
Radiated Emission	30MHz ~ 1000MHz	2	2.64
Radiated Emission	1000MHz ~ 6000MHz	2	5.10
Radiated Emission	6000MHz ~ 18000MHz	2	2.52
Power Clamp	30MHz ~ 300MHz	2	2.20

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Streaming Audio Receiver	
Model Name	oliostream 1	
Additional Model Number(s)	oliostream SE, oliostream one	
Model Difference	All models are identical except model's name and appearance.	
Product Description	The EUT is a Streaming Audio Receiver.	
	Operating frequency:	2.4 GHz by BT & WiFi (Declaration by factory)
	Connecting I/O port:	N/A
	Based on the application, features, or specification exhibited in User's Manual. More details of EUT technical specification, please refer to the User's Manual.	
Power Source	AC Voltage	
Power Rating	Adapter Model: RS-055100001 Adapter Rating: Input: AC 100-240V, 50/60Hz, 0.2A Output: DC 5.5V, 1.0A	

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Working

For Conducted Test	
Final Test Mode	Description
Mode 1	Working

For Radiated Test	
Final Test Mode	Description
Mode 1	Working

2.3 DESCRIPTION OF TEST SETUP

Mode RE: Working

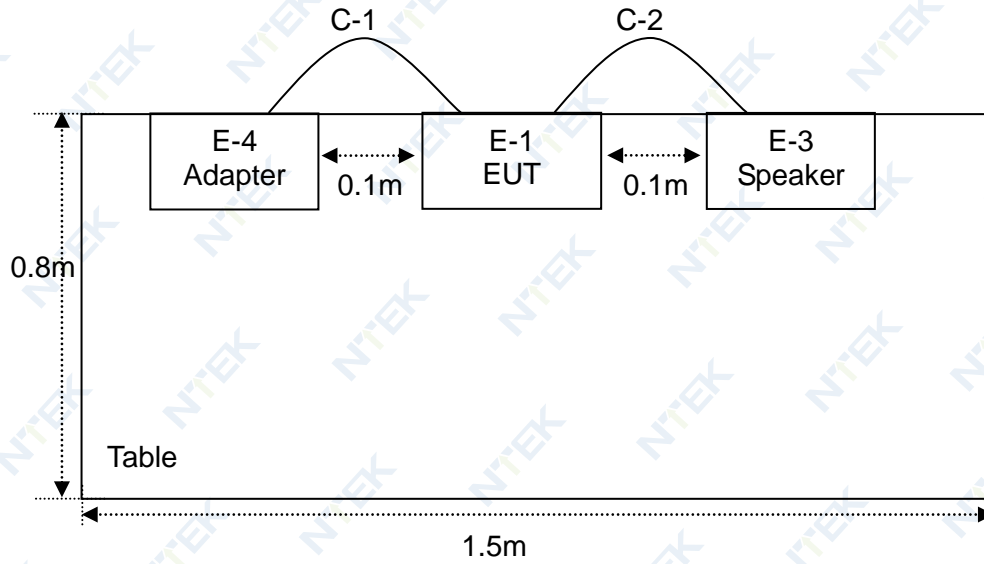

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Streaming Audio Receiver	IEAST	oliostream 1	N/A	EUT
E-2	Adapter	N/A	RS-055100001	N/A	EUT
E-3	Speaker	N/A	N/A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	100cm	
C-2	NO	NO	50cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" means "shielded" "with core"; "NO" means "unshielded" "without core".

2.5 MEASUREMENT INSTRUMENTS LIST

2.5.1 CONDUCTED TEST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Single Phase LISN	R&S	ENV216	101490	Jul. 01, 2021	Jun. 30, 2022	1 year
2	Single Phase LISN	R&S	ENV216	101313	Apr. 27, 2021	Apr. 26, 2022	1 year
3	Three-Phase LISN	SCHWARZBECK	NNLK 8129	8129245	Apr. 27, 2021	Apr. 26, 2022	1 year
4	Low frequency cable	N/A	C-01	N/A	May 11, 2020	May 10, 2023	3 years
5	50Ω Coaxial Switch	Anritsu	MP59B	6200983704	May 11, 2020	May 10, 2023	3 years
6	EMI Test Receiver	R&S	ESCI	101160	Apr. 27, 2021	Apr. 26, 2022	1 year

2.5.2 RADIATED TEST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESPI7	101318	Apr. 27, 2021	Apr. 26, 2022	1 year
2	Bilog Antenna	TESEQ	CBL6111D	31216	Mar. 29, 2021	Mar. 28, 2022	1 year
3	System Controller	SKET	N/A	N/A	N/A	N/A	N/A
4	Antenna Mast	SKET	N/A	N/A	N/A	N/A	N/A
5	System Controller	ADT	SC100	N/A	N/A	N/A	N/A
6	Antenna Mast	ADT	N/A	N/A	N/A	N/A	N/A
7	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	May 11, 2020	May 10, 2023	3 years
8	Low Frequency Cable	N/A	R-03	N/A	Jun. 28, 2019	Jun. 27, 2022	3 years
9	Attenuator	Eastsheep	5W-N-JK-6G-6DB	N/A	Aug. 13, 2021	Aug. 12, 2022	1 year
10	RF Cable	Pasternack	PE332-1000CM	N/A	Nov. 10, 2019	Nov. 09, 2022	3 years
11	Broadband Horn Antenna	EM	EM-AH-10180	2011071402	Mar. 29, 2021	Mar. 28, 2022	1 year
12	Spectrum Analyzer	Agilent	E4407B	MY45108040	Apr. 27, 2021	Apr. 26, 2022	1 year
13	Pre-Amplifier	EMC	EMC051835SE	980246	Jul. 01, 2021	Jun. 30, 2022	1 year
14	Cable	Keysight	A40-2.92M2.92M-2M	1808041	Nov. 18, 2019	Nov. 17, 2022	3 years

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	<input type="checkbox"/> Class A (dB μ V)		<input checked="" type="checkbox"/> Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 - 5.0	73.00	60.00	56.00	46.00
5.0 - 30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of The cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

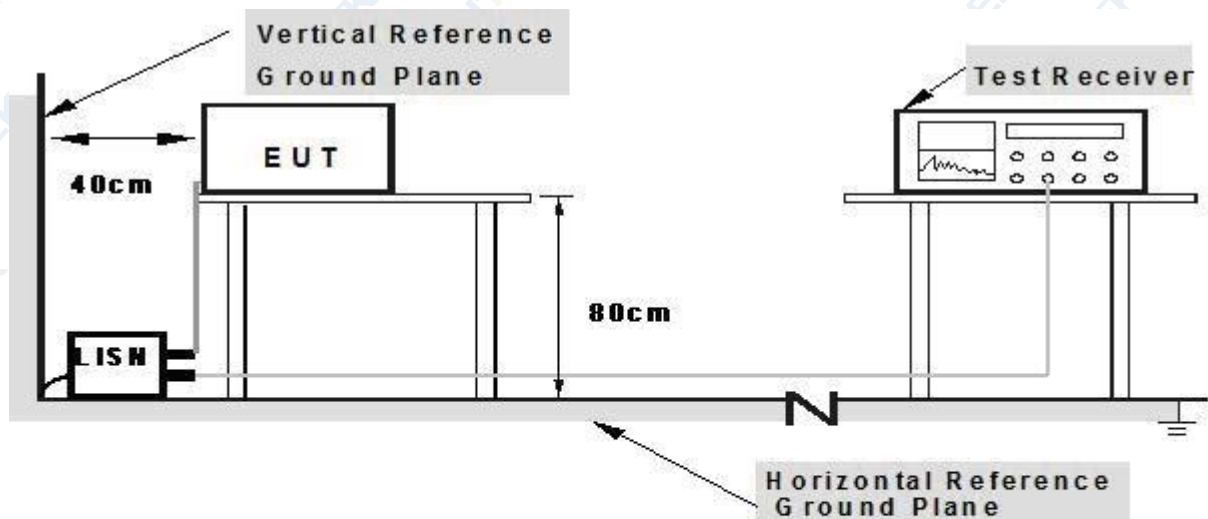

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.1.5 TEST RESULTS

EUT:	Streaming Audio Receiver	Model Name:	oliostream 1
Temperature:	24.6℃	Relative Humidity:	45%
Pressure:	1010hPa	Test Date:	2021-09-13
Test Mode:	Working	Phase:	L
Test Voltage:	AC 120V/60Hz		

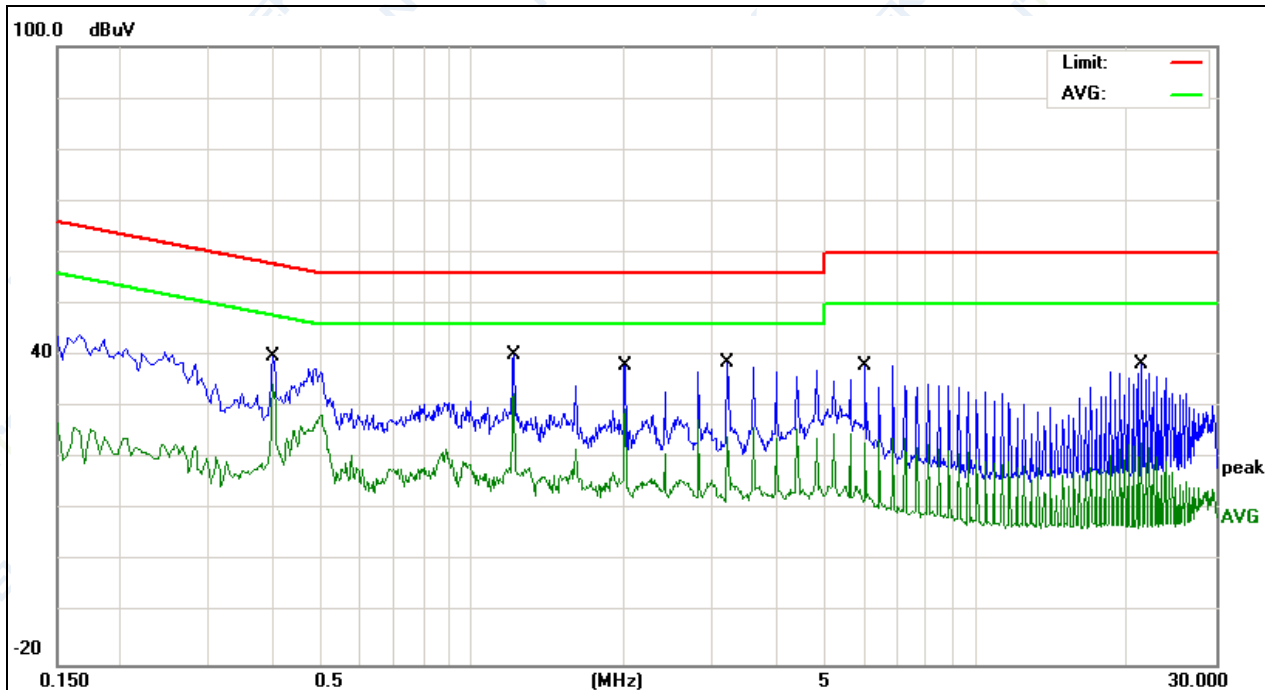

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4020	30.23	9.64	39.87	57.81	-17.94	QP	
2	*	0.4020	24.71	9.64	34.35	47.81	-13.46	AVG	
3		1.2100	30.37	9.75	40.12	56.00	-15.88	QP	
4		1.2100	22.78	9.75	32.53	46.00	-13.47	AVG	
5		2.0140	28.39	9.76	38.15	56.00	-17.85	QP	
6		2.0140	19.89	9.76	29.65	46.00	-16.35	AVG	
7		3.2220	29.09	9.71	38.80	56.00	-17.20	QP	
8		3.2220	14.48	9.71	24.19	46.00	-21.81	AVG	
9		6.0379	28.45	9.69	38.14	60.00	-21.86	QP	
10		6.0379	15.26	9.69	24.95	50.00	-25.05	AVG	
11		21.3500	28.53	9.85	38.38	60.00	-21.62	QP	
12		21.3500	13.30	9.85	23.15	50.00	-26.85	AVG	


Remark:

Correct Factor = Insertion Loss + Cable Loss

Measurement Level = Reading Level + Correct Factor

Over Level = Measurement Level - Limit

EUT:	Streaming Audio Receiver	Model Name:	oliostream 1
Temperature:	24.6°C	Relative Humidity:	45%
Pressure:	1010hPa	Test Date:	2021-09-13
Test Mode:	Working	Phase:	N
Test Voltage:	AC 120V/60Hz		

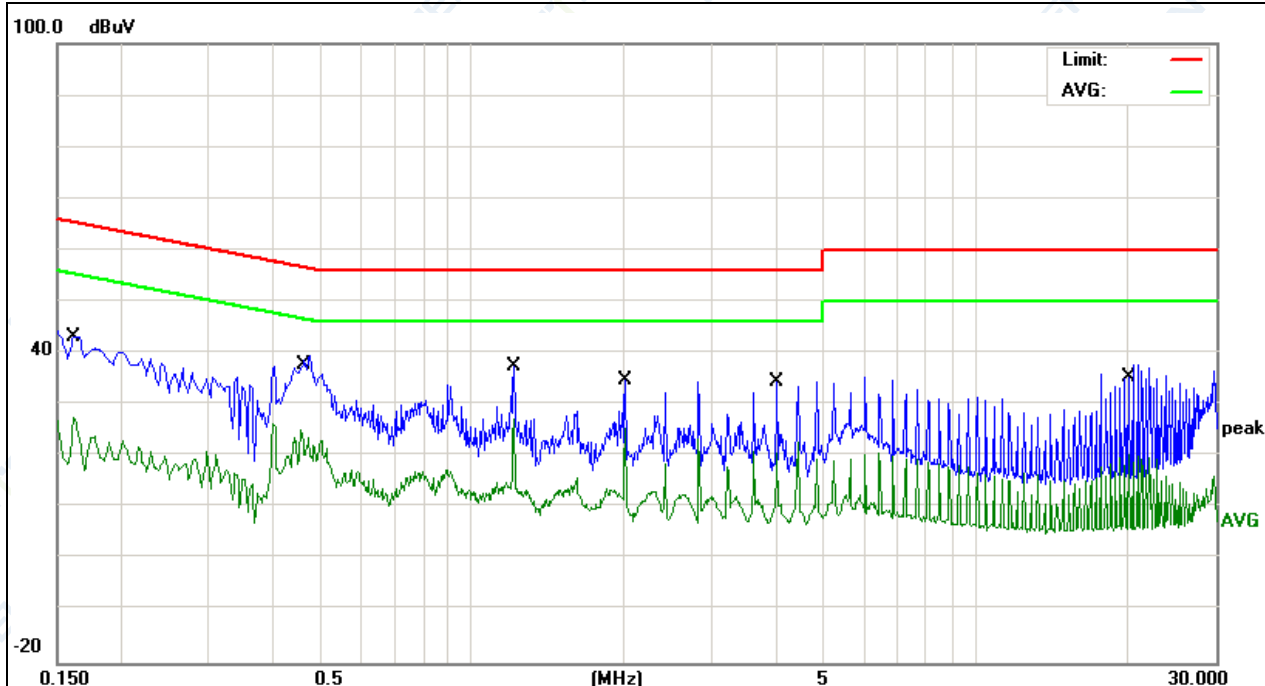

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	34.68	9.63	44.31	65.36	-21.05	QP	
2		0.1620	17.95	9.63	27.58	55.36	-27.78	AVG	
3	*	0.4580	29.87	9.73	39.60	56.73	-17.13	QP	
4		0.4580	15.31	9.73	25.04	46.73	-21.69	AVG	
5		1.2100	27.61	9.73	37.34	56.00	-18.66	QP	
6		1.2100	17.67	9.73	27.40	46.00	-18.60	AVG	
7		2.0140	25.13	9.66	34.79	56.00	-21.21	QP	
8		2.0140	15.67	9.66	25.33	46.00	-20.67	AVG	
9		4.0300	24.60	9.77	34.37	56.00	-21.63	QP	
10		4.0300	10.80	9.77	20.57	46.00	-25.43	AVG	
11		20.1580	28.11	9.75	37.86	60.00	-22.14	QP	
12		20.1580	10.64	9.75	20.39	50.00	-29.61	AVG	

Remark:

Correct Factor = Insertion Loss + Cable Loss

Measurement Level = Reading Level + Correct Factor

Over Level = Measurement Level - Limit

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	<input type="checkbox"/> Class A (at 3m)	<input checked="" type="checkbox"/> Class B (at 3m)
	dB μ V/m	dB μ V/m
30 ~ 88	49.5	40.0
88 ~ 216	53.9	43.5
216 ~ 960	56.9	46.0
Above 960	60.0	54.0

Notes:


- (1) The limit for radiated test was performed according to as following: FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB μ V/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE


- a. The measuring distance of at 3m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked And then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

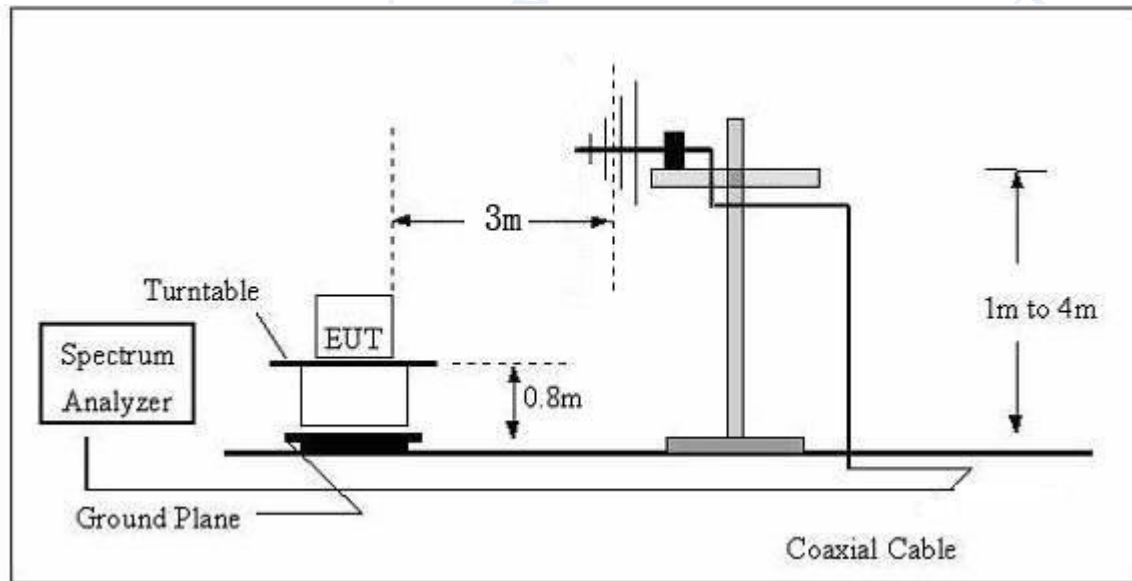

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

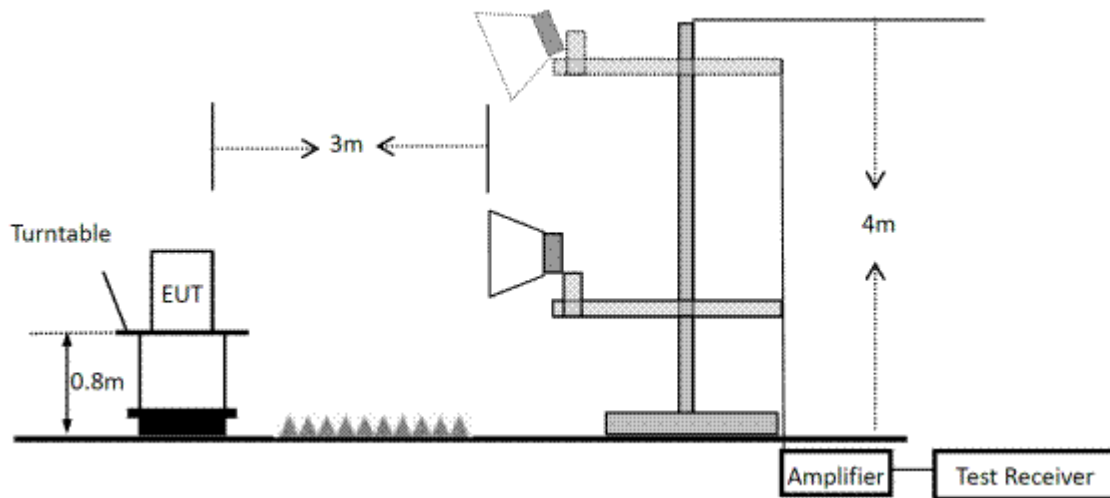


3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 TEST RESULTS(30-1000MHz)

EUT:	Streaming Audio Receiver	Model Name:	oliostream 1
Temperature:	24.9℃	Relative Humidity:	52%
Pressure:	1010hPa	Test Date:	2021-09-13
Test Mode:	Working	Polarization:	Horizontal
Test Power:	AC 120V/60Hz		

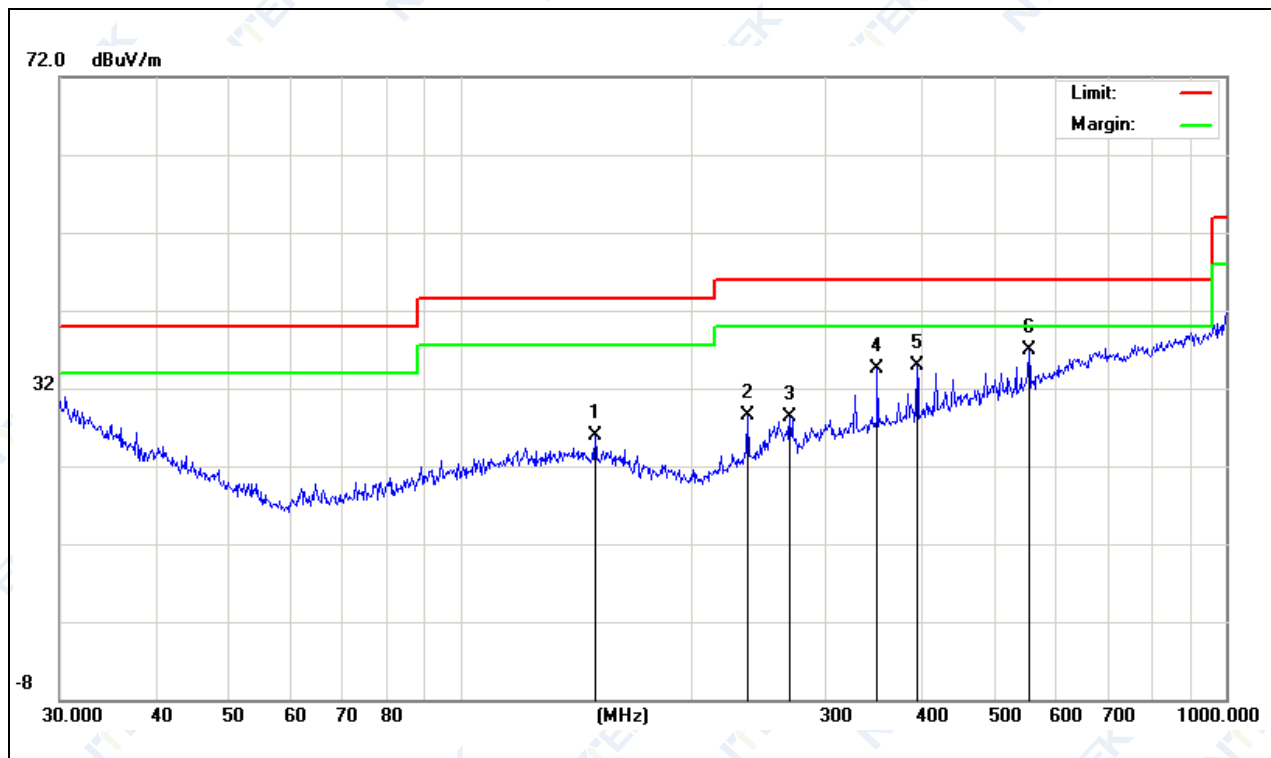

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		150.0108	7.39	18.45	25.84	43.50	-17.66	QP		
2		237.4760	10.14	18.36	28.50	46.00	-17.50	QP		
3		269.4284	7.11	21.22	28.33	46.00	-17.67	QP		
4		350.4768	11.67	22.92	34.59	46.00	-11.41	QP		
5		394.8545	11.31	23.66	34.97	46.00	-11.03	QP		
6	*	552.8832	9.44	27.38	36.82	46.00	-9.18	QP		

Remark:


Correct Factor = Antenna Factor + Cable Loss – Pre-Amplifier gain

Measurement Level = Reading Level + Correct Factor

Over Level = Measurement Level - Limit

EUT:	Streaming Audio Receiver	Model Name:	oliostream 1
Temperature:	24.9℃	Relative Humidity:	52%
Pressure:	1010hPa	Test Date:	2021-09-13
Test Mode:	Working	Polarization:	Vertical
Test Power:	AC 120V/60Hz		

72.0 dBuV/m

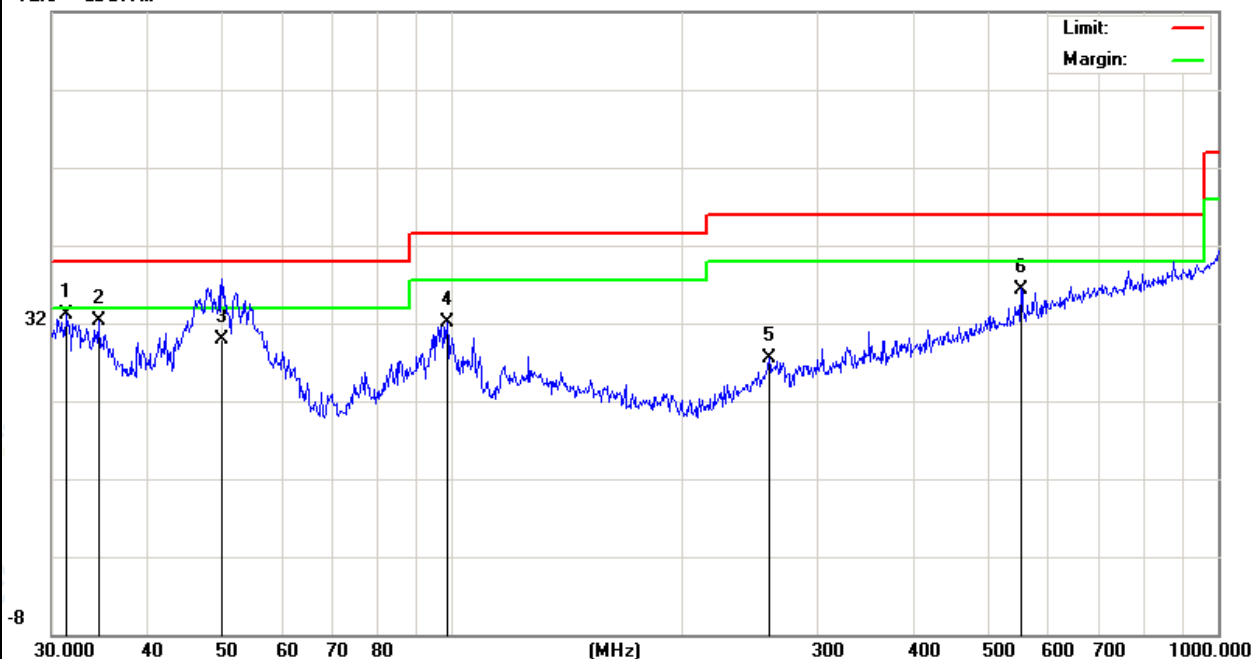

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	31.3992	9.31	23.76	33.07	40.00	-6.93	QP		
2		34.5172	10.55	21.75	32.30	40.00	-7.70	QP		
3		50.0566	15.30	14.60	29.90	40.00	-10.10	QP		
4		98.4866	15.78	16.41	32.19	43.50	-11.31	QP		
5		259.2338	6.45	21.10	27.55	46.00	-18.45	QP		
6		552.8832	9.02	27.38	36.40	46.00	-9.60	QP		

Remark:


Correct Factor = Antenna Factor + Cable Loss – Pre-Amplifier gain

Measurement Level = Reading Level + Correct Factor

Over Level = Measurement Level - Limit

3.2.6 TEST RESULTS(Above 1000MHz)

EUT:	Streaming Audio Receiver	Model Name:	oliostream 1
Temperature:	24.6℃	Relative Humidity:	49%
Pressure:	1010hPa	Test Date:	2021-09-14
Test Mode:	Working	Polarization:	Horizontal
Test Power:	AC 120V/60Hz		

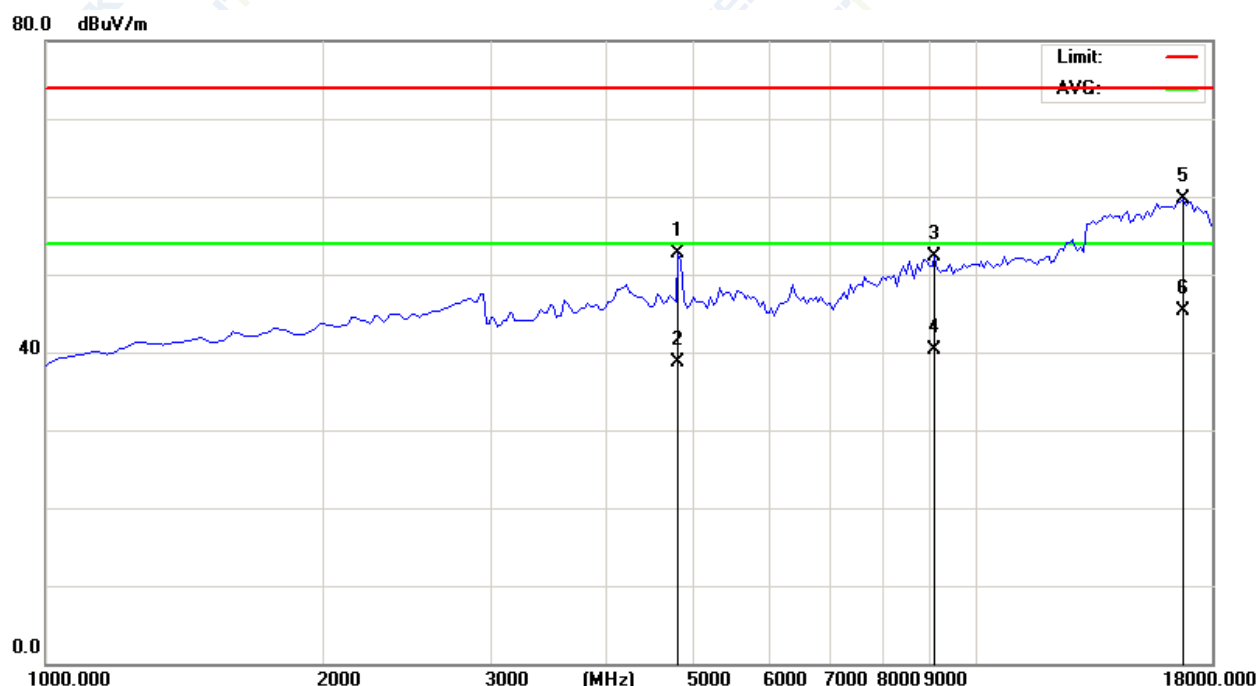

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4825.000	40.68	12.06	52.74	74.00	-21.26	peak		
2		4825.000	26.68	12.06	38.74	54.00	-15.26	AVG		
3		9117.500	34.05	18.16	52.21	74.00	-21.79	peak		
4		9117.500	22.16	18.16	40.32	54.00	-13.68	AVG		
5		16810.00	34.36	25.38	59.74	74.00	-14.26	peak		
6	*	16810.00	19.94	25.38	45.32	54.00	-8.68	AVG		


Remark:

Correct Factor = Antenna Factor + Cable Loss – Pre-Amplifier gain

Measurement Level = Reading Level + Correct Factor

Over Level = Measurement Level - Limit

EUT:	Streaming Audio Receiver	Model Name:	oliostream 1
Temperature:	24.6℃	Relative Humidity:	49%
Pressure:	1010hPa	Test Date:	2021-09-14
Test Mode:	Working	Polarization:	Vertical
Test Power:	AC 120V/60Hz		

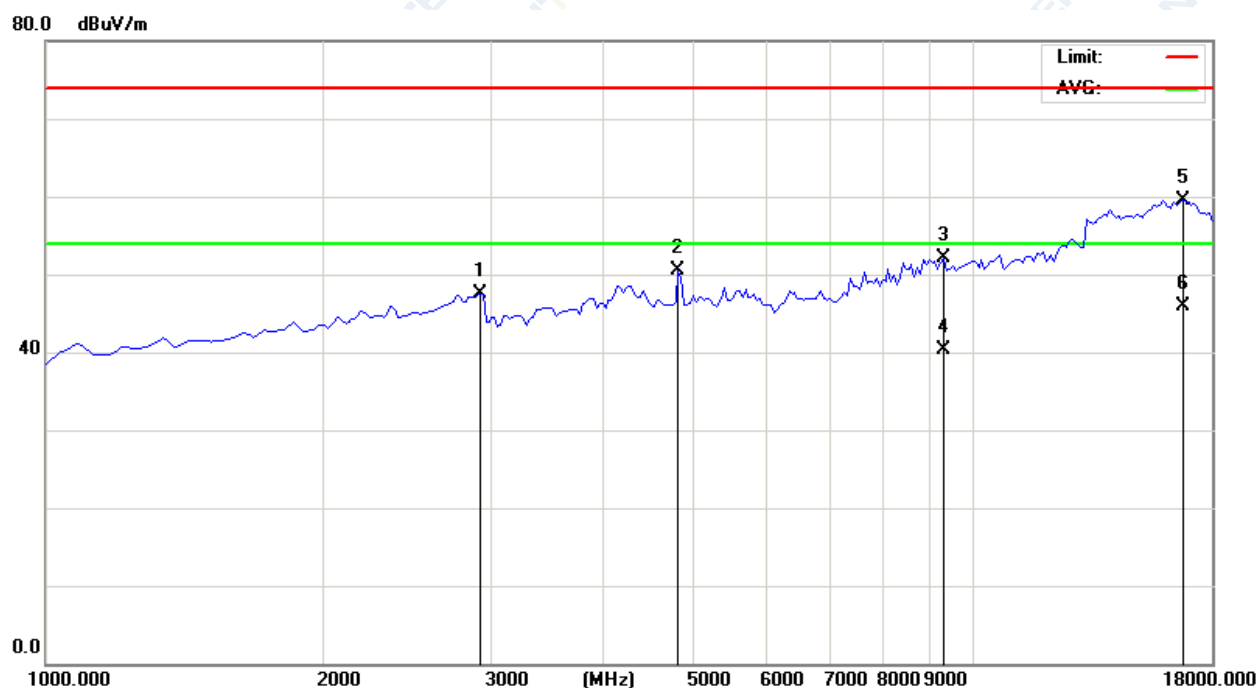

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2955.000	39.03	8.56	47.59	74.00	-26.41	peak		
2		4825.000	38.39	12.06	50.45	74.00	-23.55	peak		
3		9287.500	33.59	18.42	52.01	74.00	-21.99	peak		
4		9287.500	21.90	18.42	40.32	54.00	-13.68	AVG		
5		16810.00	34.12	25.38	59.50	74.00	-14.50	peak		
6	*	16810.00	20.49	25.38	45.87	54.00	-8.13	AVG		

Remark:


Correct Factor = Antenna Factor + Cable Loss – Pre-Amplifier gain

Measurement Level = Reading Level + Correct Factor


Over Level = Measurement Level - Limit

4. EUT TEST PHOTO

Radiated Measurement Photo

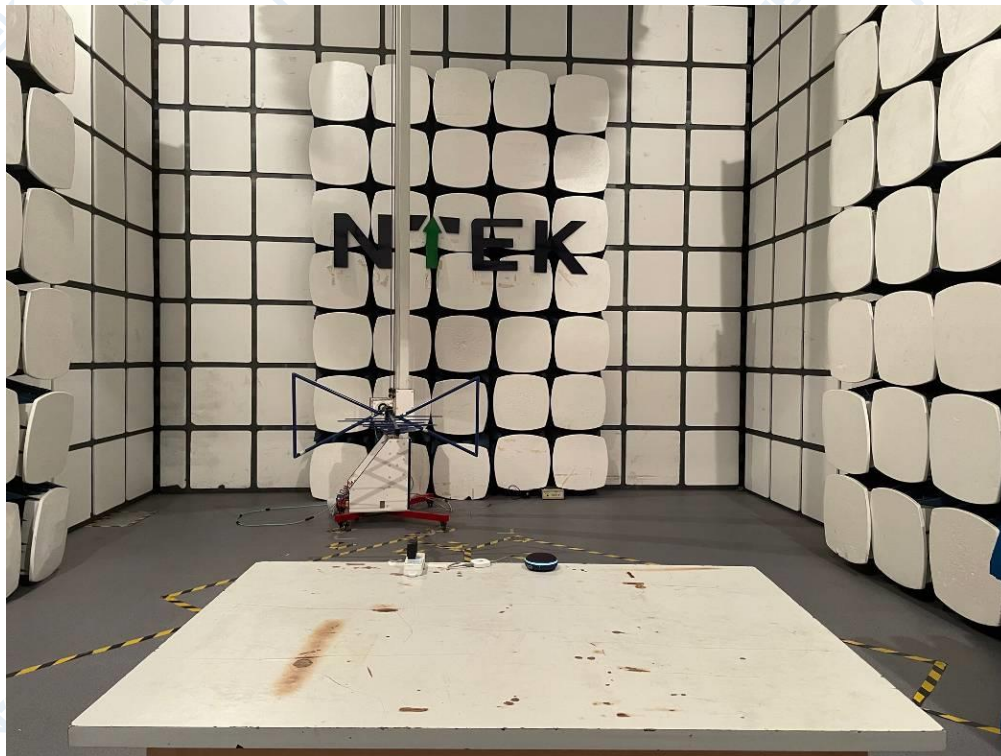

Conducted Measurement Photo

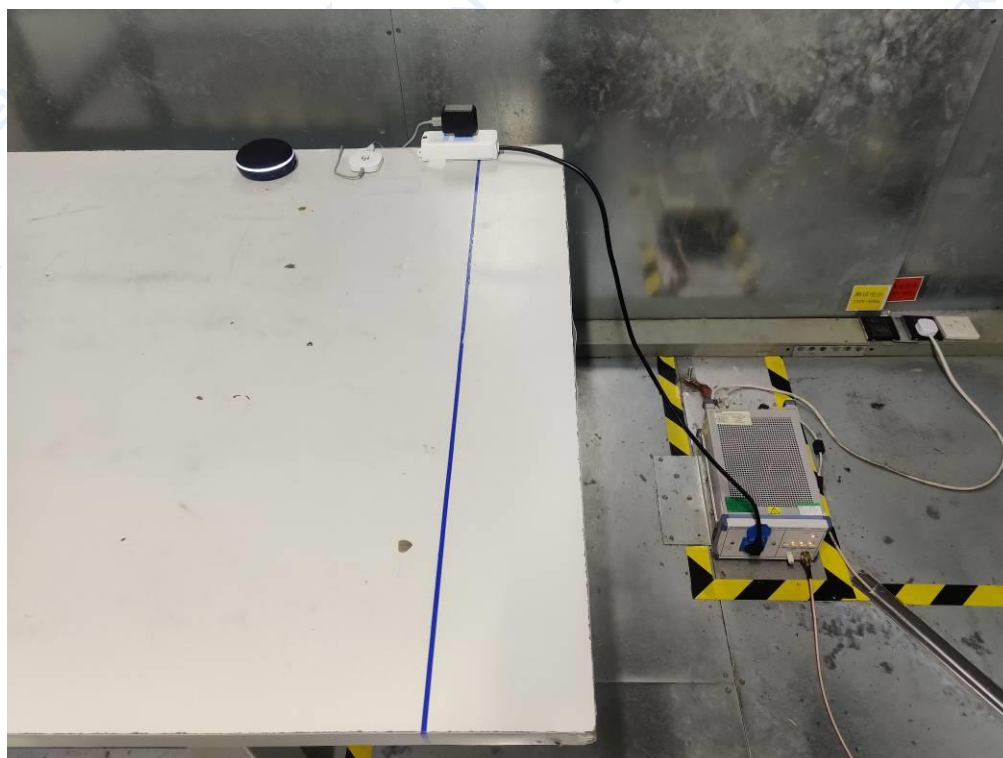

ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1



Photo 2

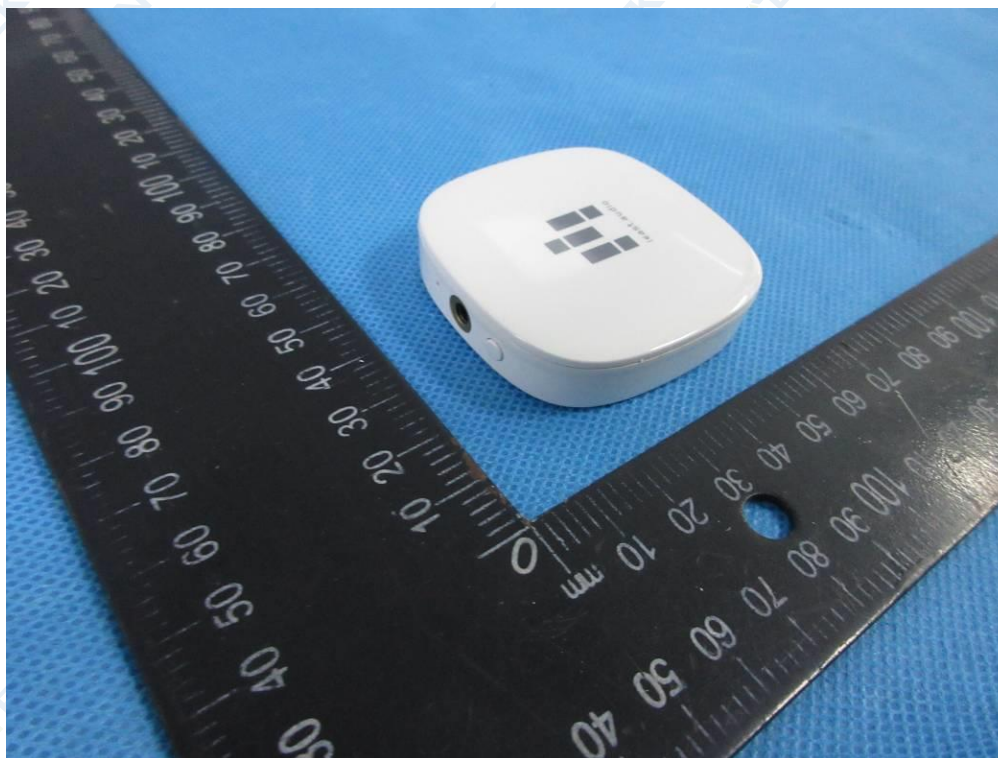


Photo 3



Photo 4



Photo 5

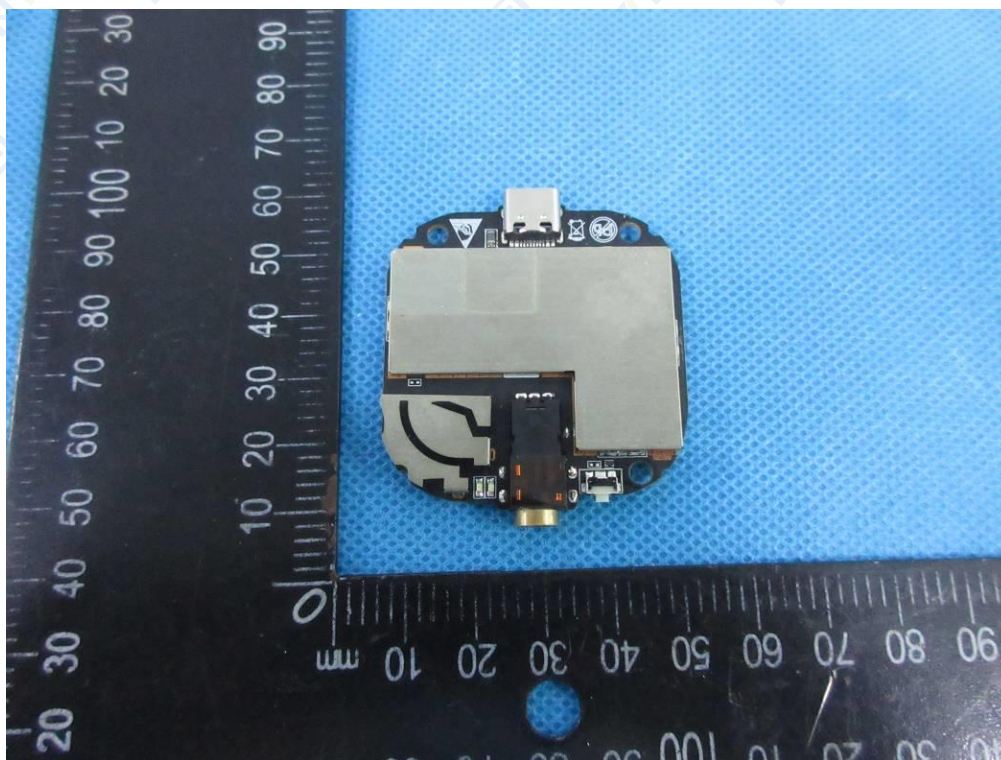


Photo 6

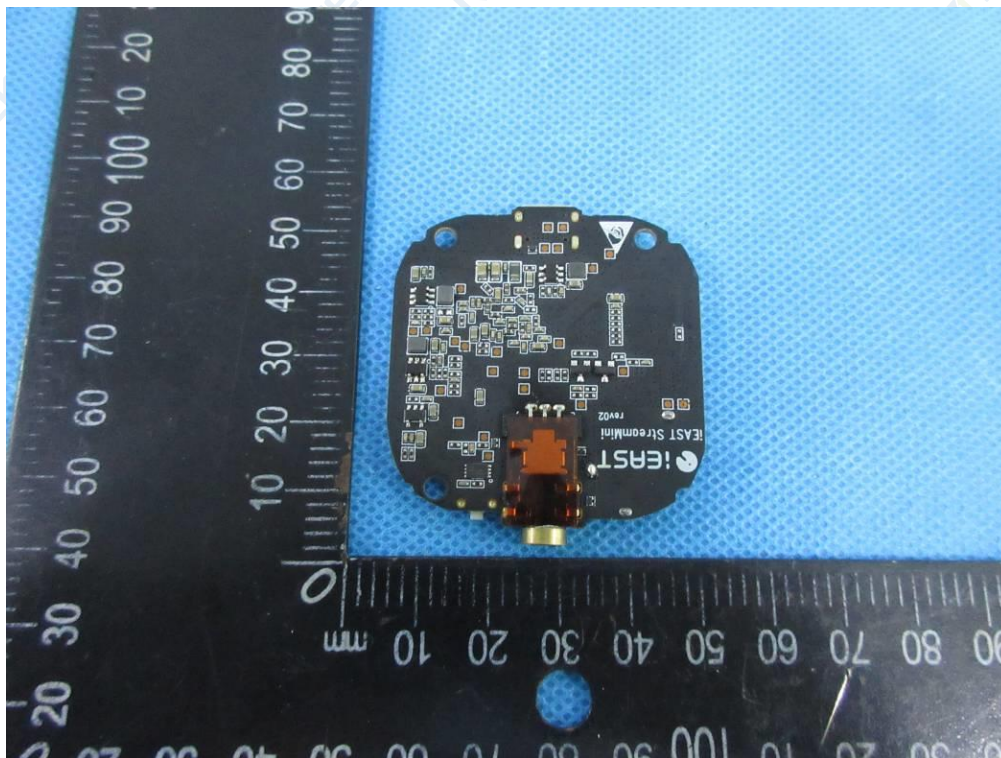


Photo 7

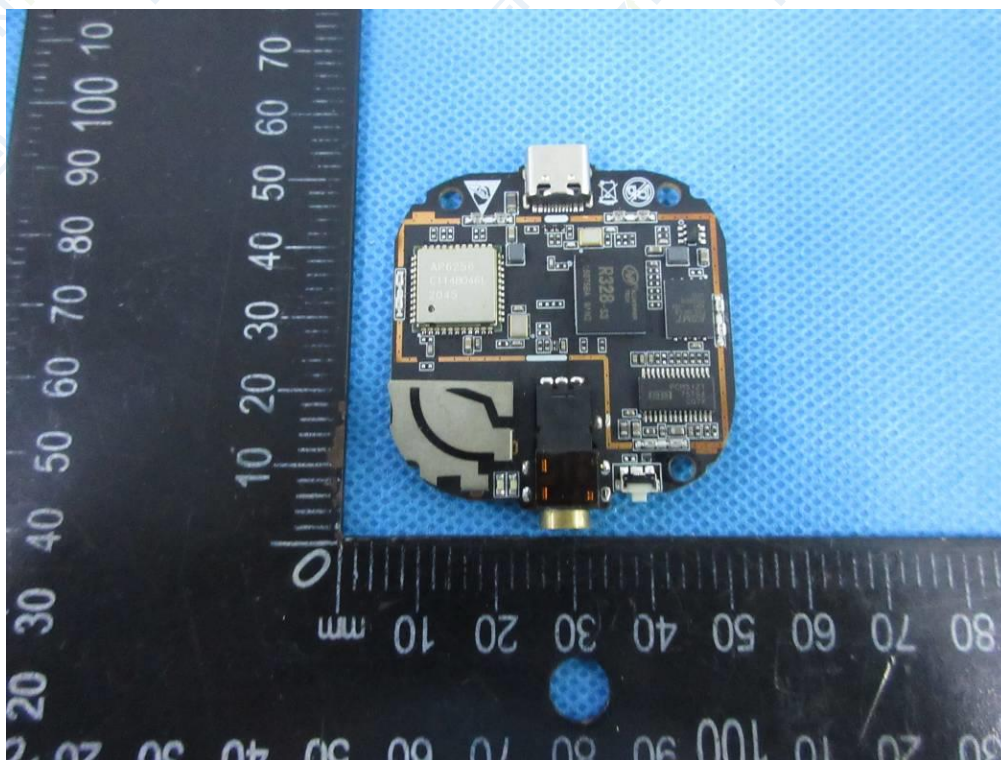


Photo 8

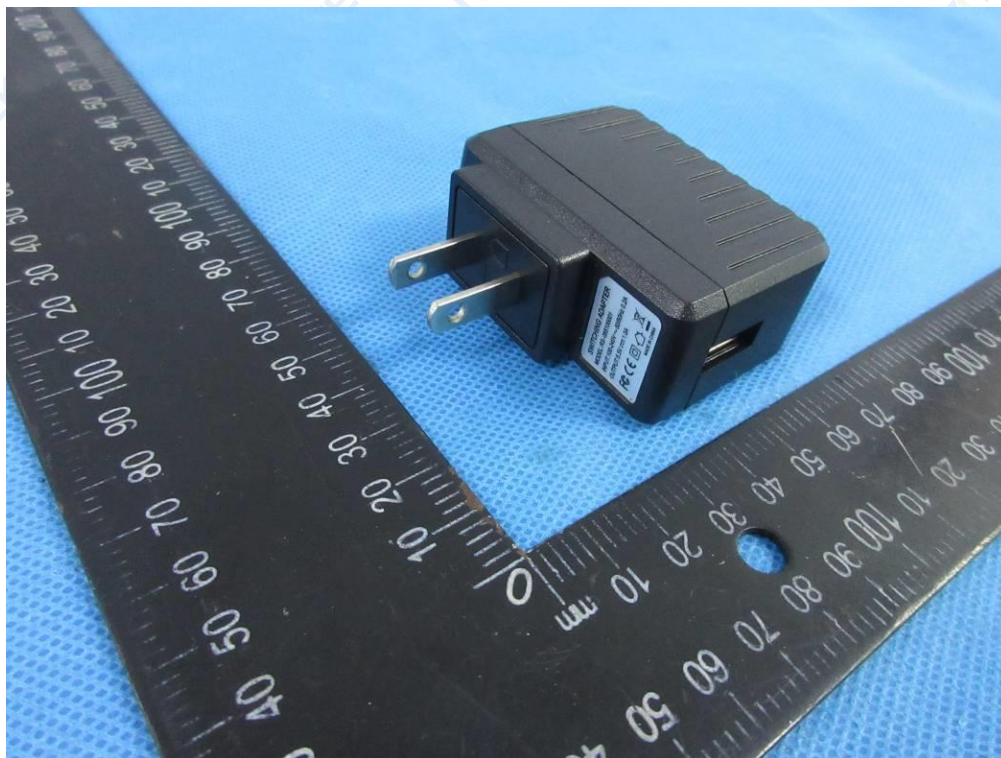


Photo 9

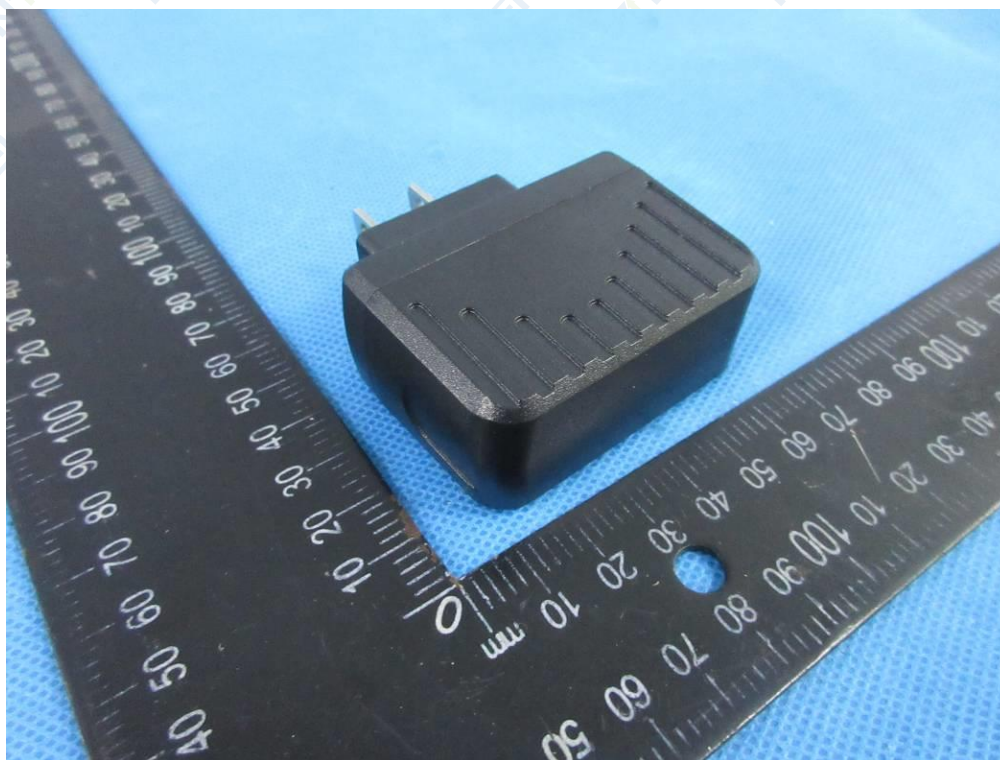


Photo 10



----- End of Report -----