



## Network Cable Fiber

### LinkIT fiber patch OS2 LC/LC 12m

Duplex | SM | LSZH | Yellow

Product number: FPD92LULU-120

## Product Description

This OS2 Duplex fiber optic cable is available in various colors and lengths, featuring LC connectors with UPC polishing on both ends. Designed for singlemode applications with a 9/125  $\mu\text{m}$  core diameter, it supports wavelengths of 1310/1550 nm. The cable offers low insertion loss of  $\leq 0.3$  dB and an optical return loss of  $\geq 55$  dB. With a 2mm diameter, the cable is jacketed in LSZH material, providing fire-retardant and halogen-free properties in compliance with IEC safety standards. It withstands temperatures from  $-40^{\circ}$  to  $+75^{\circ}\text{C}$ , has a bending radius of 20mm, and a tensile load capacity of 150N. Certified to CE and RoHS standards.

## Main Specifications

Brand	LinkIT
Color	Yellow
Length (m)	12
Category	OS2
Connector type 1	LC
Connector type 2	LC
Polishing contact 1	UPC
Polishing contact 2	UPC
Cable type	Duplex
Number of fibers	2
Wave length (nm)	1310/1550nm
Core Diameter ( $\mu\text{m}$ )	9/125 Singlemode

## Extended Specifications

Jacket material	LSZH
-----------------	------



<b>Anti-kink sleeve</b>	Moulded
<b>Optical Return Loss (dB)</b>	≥55dB
<b>Insertion Loss (dB)</b>	≤0.3 dB
<b>Operating Temperature</b>	-40° ~ +75°C
<b>Storage Temperature</b>	-40° ~ +75°C
<b>Cable Diameter (mm)</b>	2.0
<b>Fire properties</b>	IEC-60332-3-24, IEC 60332-1-2, IEC 61034, IEC 60754-1
<b>Halogenfree</b>	✓
<b>Oil resistant</b>	✗
<b>Fire retardant version</b>	✓
<b>Bending radius (mm)</b>	20mm
<b>EAN</b>	7072662010287
<b>Tensile loads (N)</b>	150N
<b>Certifications</b>	CE, RoHS

## Single packaging


<b>GTIN f-pak</b>	7072662010287
<b>Unit</b>	PCE
<b>Quantity</b>	7
<b>Height (cm)</b>	9
<b>Width (cm)</b>	22
<b>Length(cm)</b>	19
<b>Weight (kg)</b>	0,65
<b>Gross Weight (kg)</b>	0,8



## Dimensional Sketches



LinkIT FiberPatch SM G657A2 LC/LC Blue, Green, Grey, Magenta, Yellow, Orange, Red

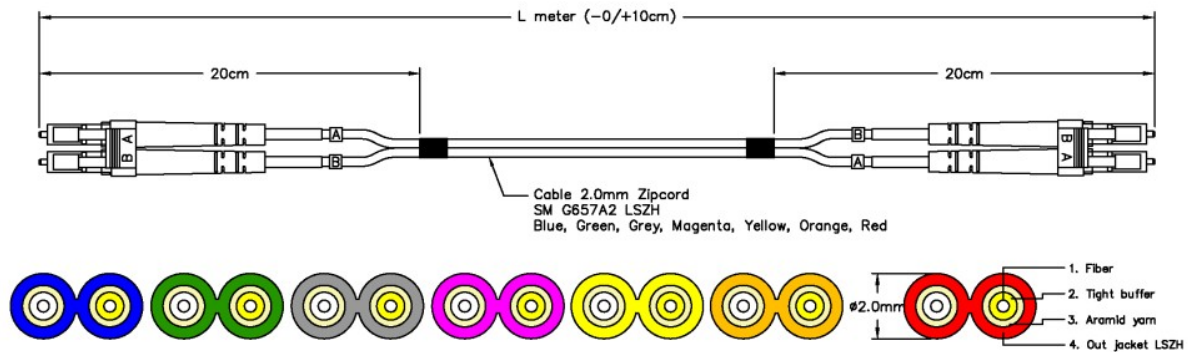

Specifications			
Connector type:	LC-LC	Insertion loss:	≤0.3dB
Fiber mode:	SM G657A2	Return loss:	≥55dB
Fiber grade:	G.657.A2 and G.652.D	Wave length:	1310/1550nm
Polish type:	UPC	Optimized Data rate:	xx
Cable jacket:	LSZH	Durability:	500 matings
Color:	Blue, Green, Grey, Magenta, Yellow, Orange, Red	Operating/storage temp:	-40°C ~ +75°C
Cable diameter:	2mm	Fire properties:	Fire retardant and halogen-free IEC 60332-3-24, IEC 60332-1-2, IEC 61034, IEC 60754-1
Minimum bend radius:	20mm	IEC standards:	All CENELEC standards required
Tensile loads:	150N		

