


HDBaseT Extender

Stoltzen SHE630 HDBaseT™ Rx

HDBT Reciever for SHE630WP Wallplate

Product number: SHE630-RX

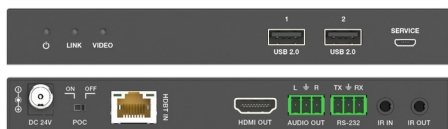

Product Description

The Stoltzen SHE630-RX Receiver is designed to work with the SHE630WP-TX Wallplate Transmitter, receiving HDMI high-definition signal, bidirectional IR control signal, bidirectional RS-232 control signal, and USB 2.0 signal over CAT6 up to 328ft/100m (HBT mode) or 492ft/150m (LRM mode). Video resolution is up to 4K2K@60Hz (4:4:4). It supports POC function with POC control switch, allowing for power to be supplied through the same cable that transmits the data.

If in LRM-Mode USB transferspeed is lower.

Main Specifications

Brand	Stoltzen
Color	Black
HDMI version	HDMI 2.0b
HDCP supported	2.2, 1.4
Max Input Resolution	3840x2160 60Hz
Max Resolution Output	3840x2160 60Hz
CEC	Passthrough
Color depth	8-bit, 10-bit, 12-bit
Bandwidth	18Gbps
Inputs	1 x HDBT (RJ45) 1 x IR (3pin-3.81mm Phoenix connector) 1 x SERVICE (Micro USB) 1 x RS-232 (3pin-3.81mm Phoenix connector)



Outputs	1 x HDMI (Type A, 19-pin female)
	1 x AUDIO (3pin-3.81mm Phoenix connector)
	2 x USB 2.0 (USB Type A)
	1 x RS-232 (3pin-3.81mm Phoenix connector)
	1 x IR (2pin-3.81mm Phoenix connector)

Extended Specifications

Distance 4K (m)	100
Distance 2K (m)	100
EAN	7072262010281
Certifications	CE, REACH

