

Network Cable Copper

LinkIT Patch U/UTP Cat5e White 0.5m
AWG 26/7 | PVC

Product number: UTP-5EH-005
EI-number: 6919511

Product Description

Cat.5e cables are cost-effective cables for less demanding installations, where the application of the network will not change in the future. Can handle 1Gbps speed and 100MHz bandwidth. Maximum total cable length end to end = 100 meters. The cable has gold-plated solid cast RJ45 connectors.

Main Specifications

Brand	LinkIT
Color	White
Length (m)	0,5
Category	Cat.5e
Connector type 1	RJ-45 male (8P8C)
Connector type 2	RJ-45 male (8P8C)
Conductor material	Copper
Cable shielding	U/UTP - unshielded/unshielded twisted pairs
Conductor design	Stranded

Extended Specifications

AWG wire size	26
Transmission speed	1000Mbps
Frequency (Mhz)	100
Cable structure	4 x 2 AWG 26/7 Twisted pair
Locking type	Snagless
NVP value	65%




Jacket material	PVC
Anti-kink sleeve	Moulded
Pin Assignment	568B-568B
Halogenfree	X
Oil resistant	X
Fire retardant version	V
Connector contact plating	Gold plated 2u
Certifications	CE, RoHS

Single packaging

Unit	PCE
Quantity	1
Height (cm)	10
Width (cm)	10
Length(cm)	1,5
Weight (kg)	0,02
Gross Weight (kg)	0,03



Dimensional Sketches

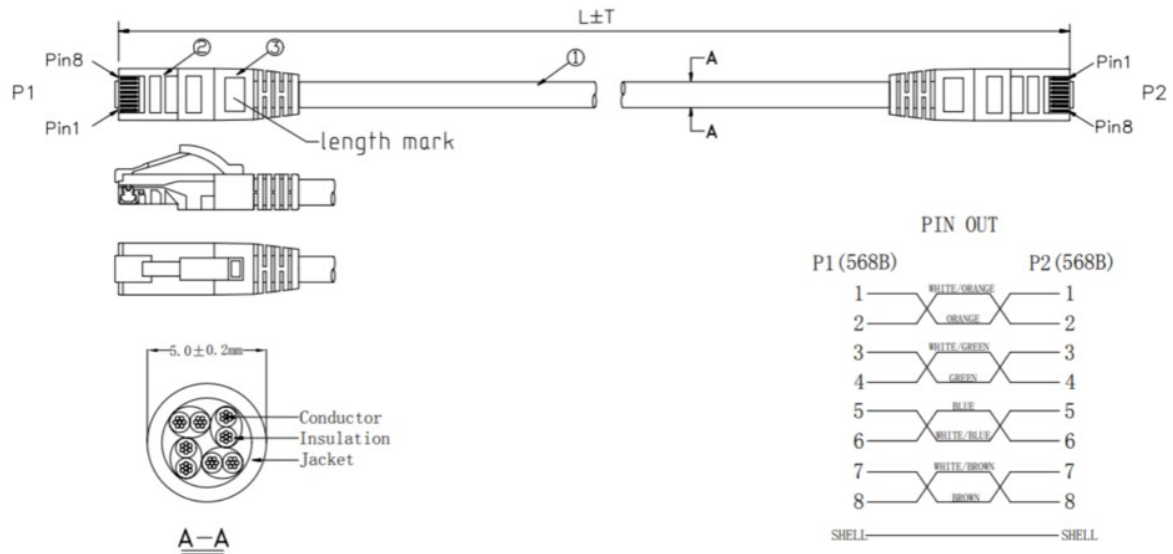

NOTES:

1. 100% Conduction, Short Circuit And Misalignment Test
2. RoHS & REACH Compliant
3. Printing: CAT5E UTP 26AWG × 4P PATCH VERIFIED TO ANSI TIA-568-C.2 & ISO/IEC 11801 ED. 2 & EN 50288-6-2 & IEC 60332-1-2

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
①	MOLDED	PVC		G
②	CONNECTOR	RJ45 8P8C, Pin Gold-Plated 2u"	2	PCS
③	CABLE	UTP CAT5E 26#(7/0.16BC) PVC/Jacket, OD: 5.0±0.2mm	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Item ref	Quantity	Title/Name, designation, material, dimension etc	Article NO./Reference
Designed by FLY	Checked by HELEN	Approved by - date 2022. 07. 25	File name Date 2022. 07. 25 Scale FREE
ANGLE: 		UTP CAT5E 26AWG BC PVC JACKET, PIN 28"	Edition 1 Sheet 1/1
UNIT:MM			

